


APC-61II *Automatic Hydraulic Cutter*

Hydraulic clamp and knife, and servo-motor driven backgauge ensure precise cutting quality.


■ High Cutting Accuracy

The backgauge is precisely positioned by servo-motor control for maximum cutting accuracy. The table is rigidly built and chromeplated. The center-driven back-gauge accurately feeds and positions a lift of sheets in every cutting sequence.

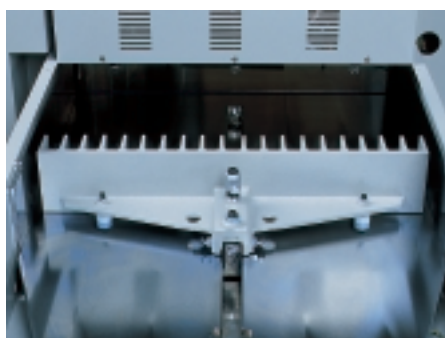

■ High-performance Backgauge Screw and Nut

The backgauge screw is induction-hardened and the nut is dust-proofed for sustained accuracy performance and longer service life. And the screw backlash can be easily eliminated.

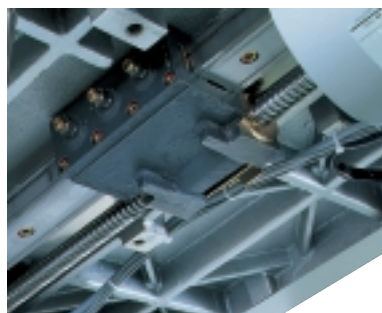

■ Simple Cutting Data Inputting

The storing capacity is 256 steps in 99 programs. The cutting data can be inputted either through the numerical keys or analog system by back-gauge travel.



● Features

- CE-marked.
- Safety Beam.
- Completely new electric design.
- Hydraulic clamp and knife.

● Specification

Max. Cutting Width	610 mm (24")
Max. Cutting Height	100 mm (3.9")
Max. Cutting Depth	610 mm (24")
Min. Cutting Depth	30 mm (1.1")
Job Memory	256 steps (99 Jobs)
Clamp Pressure	500 to 1,700 kg
Machine Weight	650 kg (1,434 lb)
Dimensions	1,202(W) x 1,470(D) x 1,270(H) mm (47.4" x 57.9" x 50.0")

HORIZON INTERNATIONAL, INC.

510 Kuze Ooyabu-cho, Minami-ku, Kyoto, 601-8206, Japan Phone : +81-(0)75-934-6700, Fax : +81-(0)75-934-6708, www.horizon.co.jp